

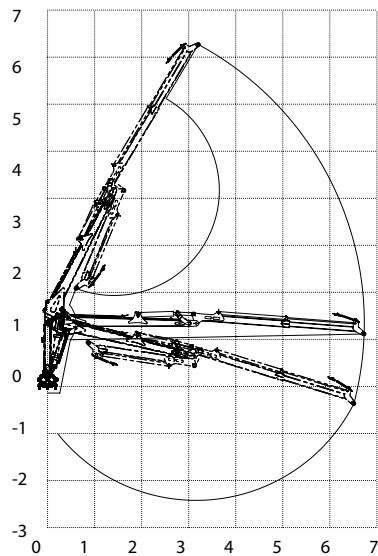
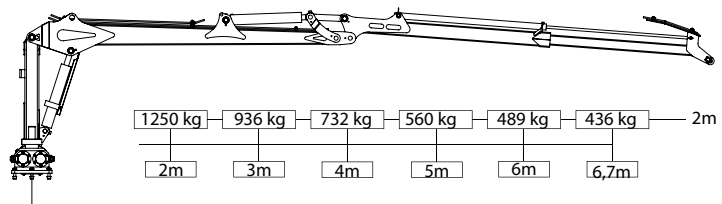


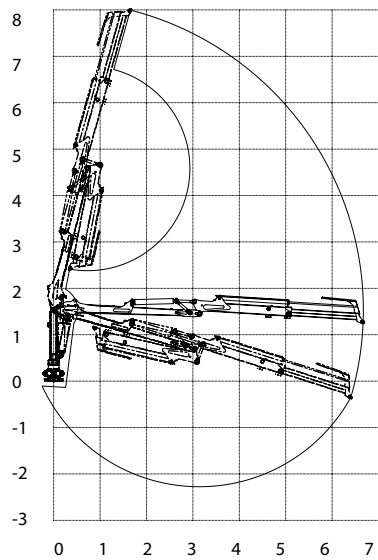

ONIAR
FORESTRY MACHINES

FOREST CRANES



ONIAR 67


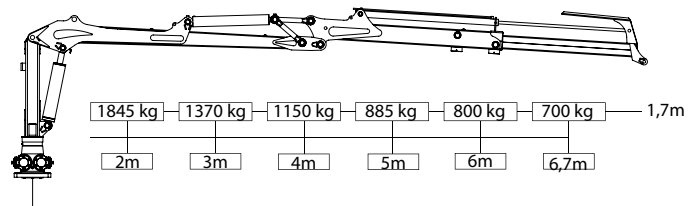


ONIAR 67S




ONIAR 52

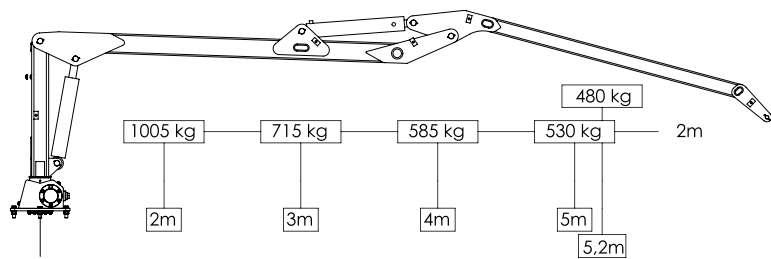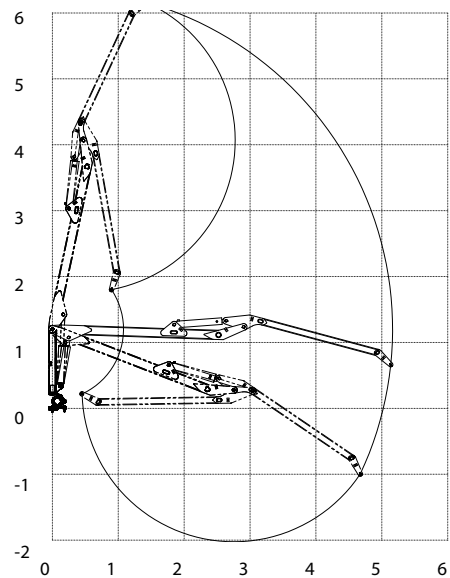

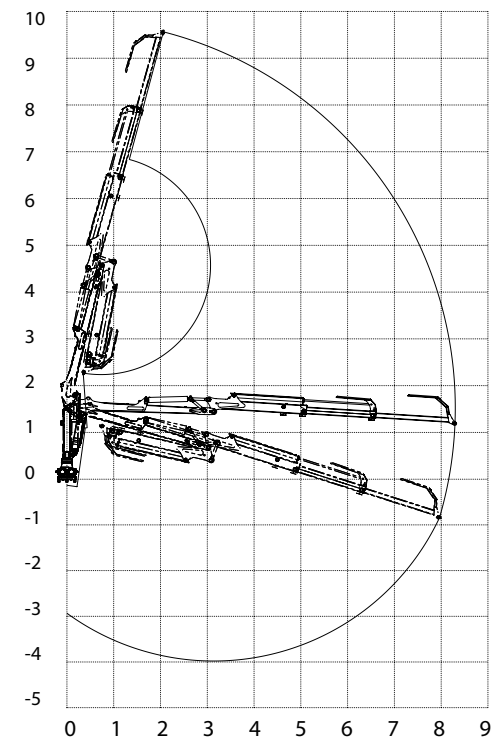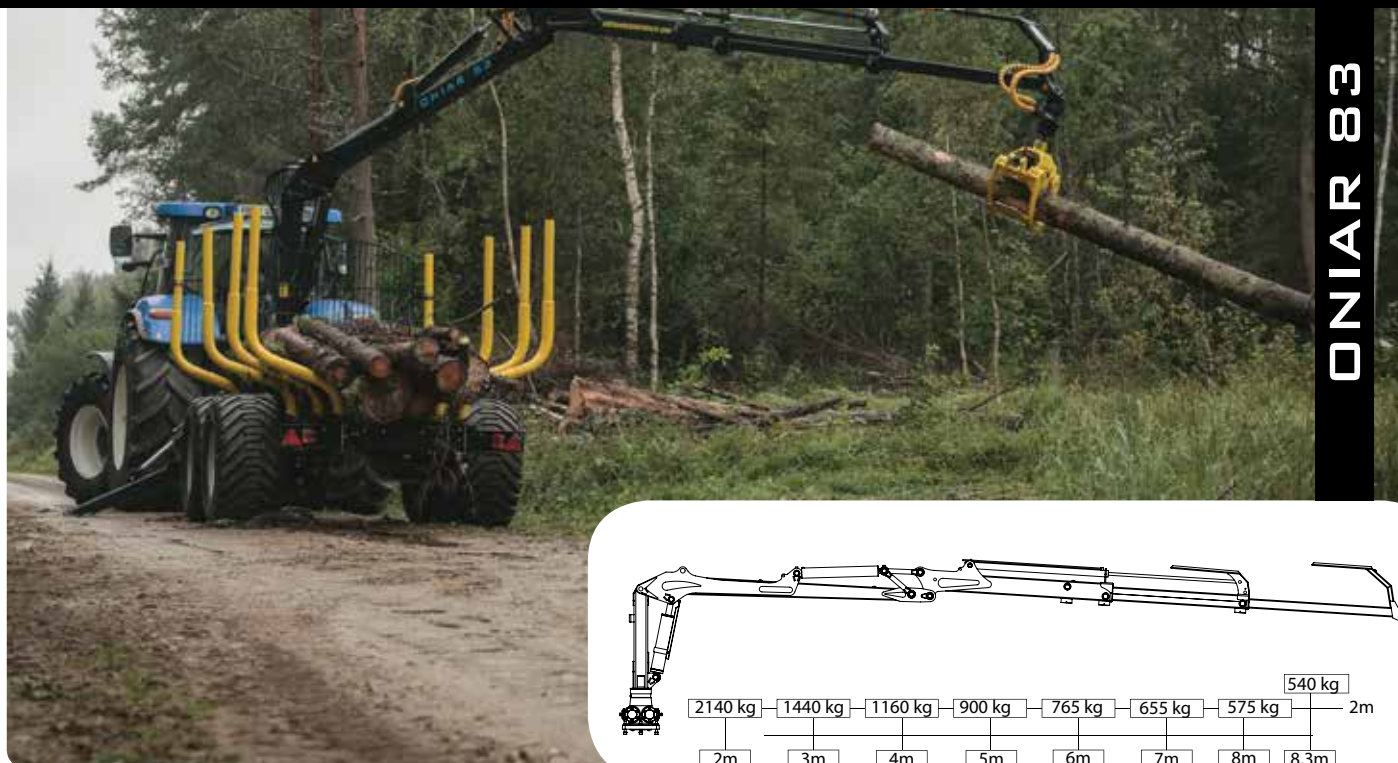


TECHNICAL INFORMATION - CRANES	52	67s	67	83	
Lifting moment, bruto	33	46	72	72	kNm
Lifting moment, neto	22	30	45	45	kNm
Maximum reach	5.2	6.7	6.7	8.3	m
Real lifting capacity in 4 meters (without grapple)	585	732	1105	1160	kg
Real lifting capacity in full length (without grapple)	490	436	700	540	kg
Telescopic reach	-	1.34	1.33	2.8	m
Slewing torque, bruto	5.7	14	15	15	kNm
Slewing angle	390	390	390	390	°
Recomm. pump capacity	30-50	40-60	40-60	40-60	l/min
Weight without grapple and rotator	530	880	1140	1230	kg


ONIAI 7T

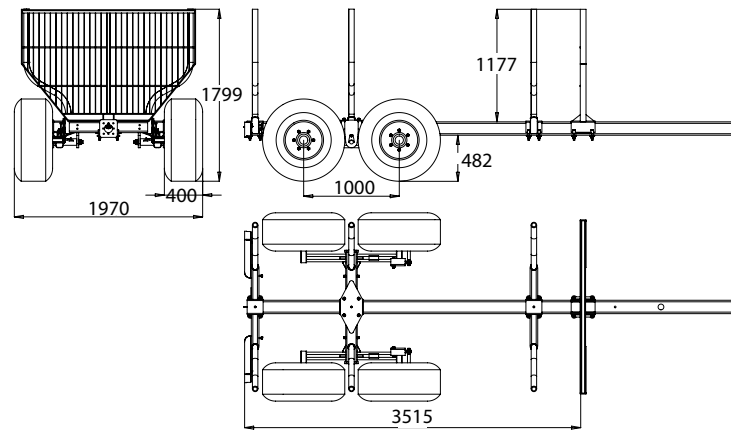


ONIAI 10T

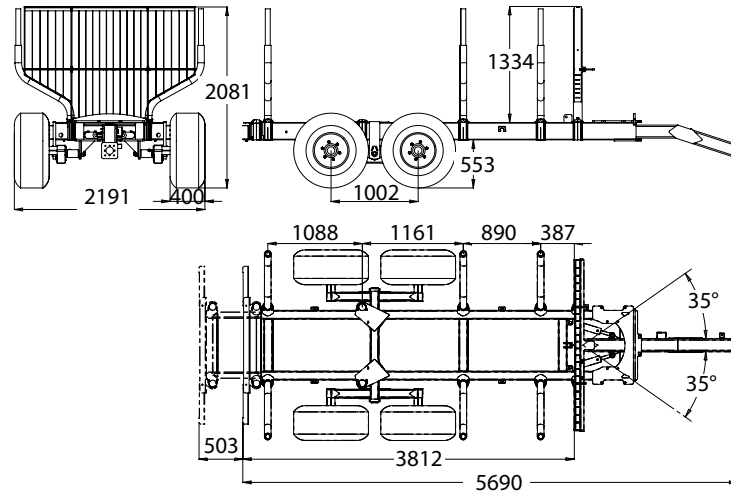


ONIAI 12T

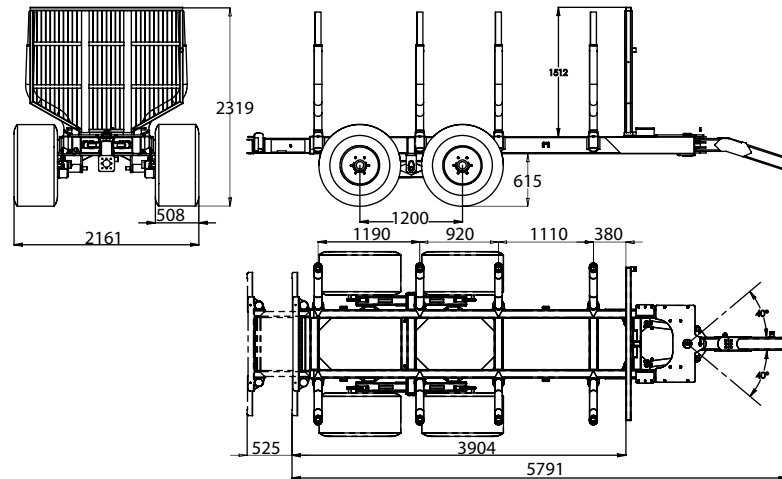

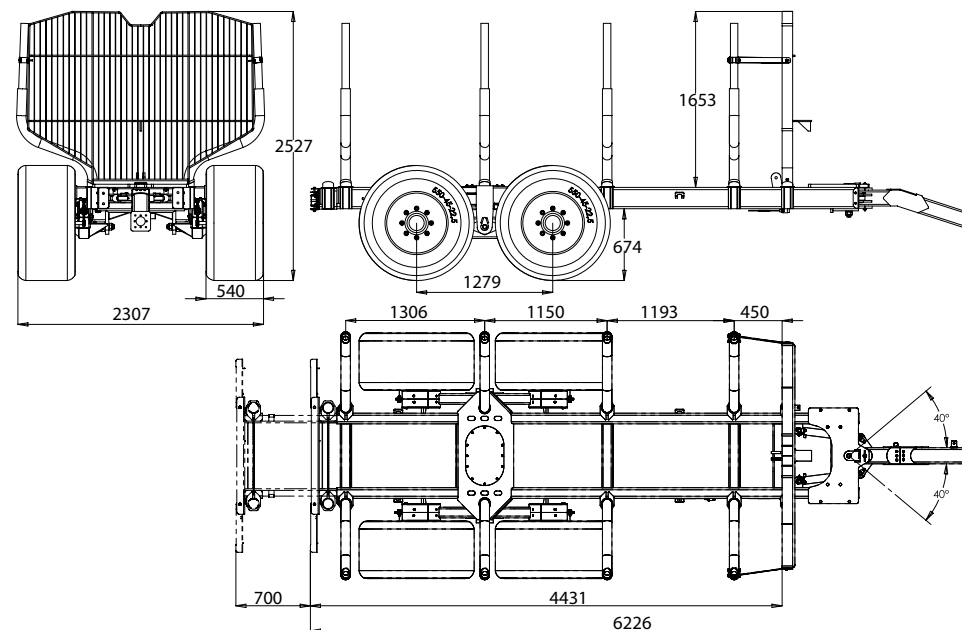


TECHNICAL INFORMATION - TRAILERS	7T	10T	12T	14T	
Loading capacity	7000	10000	12000	14000	kg
Loading area	1.9	2.25	2.4	3.0	m ²
Trailer frame profile	140x140x8	2x(200x100x5)	2x(200x100x6)	2x(200x100x8)	mm
Standard axles	60x60	70x70	80x80	90x90	mm
Wheel width	up to 400	up to 520	up to 550	up to 600	mm
Trailer weight	1100	1600	1800	2100	kg


ONIAR G16

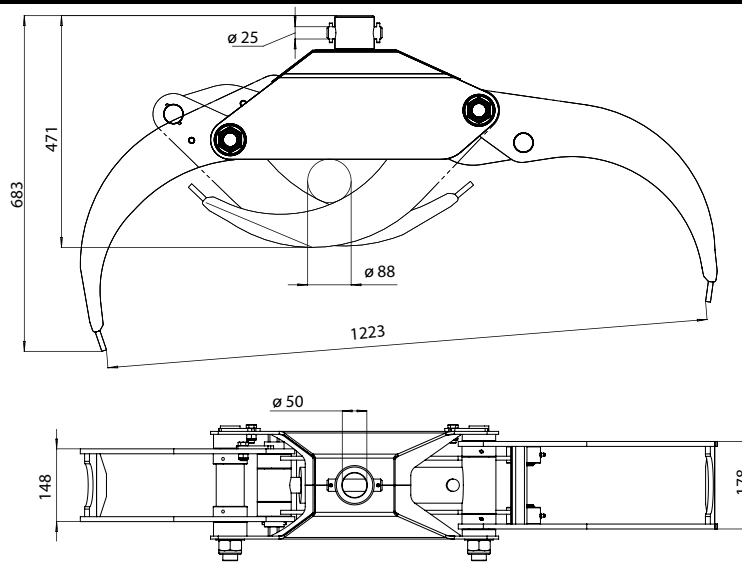

ONIAR G21

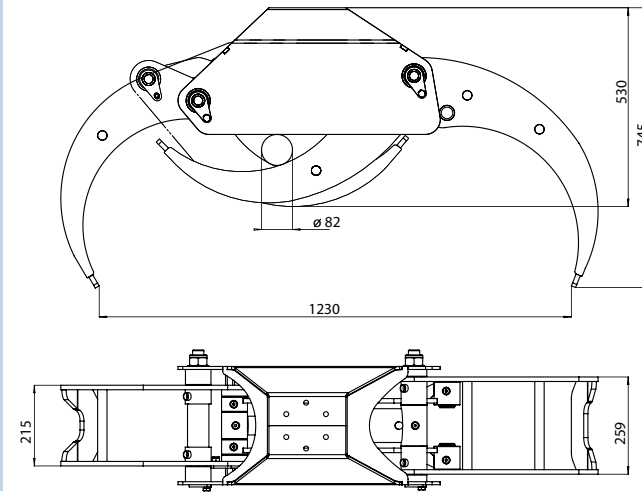

ONIAR G23

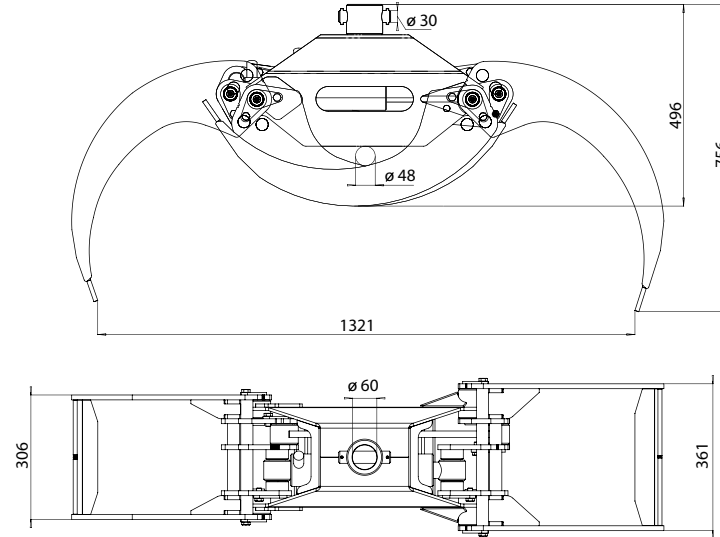

TECHNICAL INFORMATION - GRAPPLES	G16	G21	G23	
Weight kg	70	120	110	kg
Area tip to tip	0.16	0.21	0.23	m2
Max gripping width mm	1223	1230	1321	mm
Min gripping diameter mm	88	82	48	mm
Rotator bolt diameter mm	49	49/59	59	mm



Wide spreading fold down support legs



Telescopic support legs take little space



Different oil tanks for independent hydraulic system from tractor



Stative for operating the valve block from outside platform.



Many tyre options to meet different needs.



Hydraulic and pneumatic brake options with protections.



Frame extension to maximize the loading length.



Protected trailer backlights.



Straight and angle draw bars with different fastening options for draw bar loop.



Oniar OÜ
Pargi 16, Märjamaa
78304 Estonia

Phone: +372 48 22 206
Fax: +372 48 22 205
www.agriforestry.com